

STORMBELL

LED Pendant Downlight

The timeless styling of **STORMBELL** unites classic form with state-of-the-art LEDs. Suspended by stainless steel aircraft cable, the pendant luminaire becomes a focal point in any architectural, retail, hospitality, or institutional interior setting. **STORMBELL** incorporates reflective optics within the housing to provide medium or wide beam distributions. Two lumen packages are available in warm or neutral white color temperatures at a CRI of 90+. Optional accessories include honeycomb louver or opal glass lens for diffusion for added light control.

PERFORMANCE (BOTH MODELS)

Housing Finish	High gloss black or white	
Shade Finish	High gloss black, white, or opal	
Color Temperature	3000k warm white or 4000k neutral white	
Color Rendering	Ra > 90	
Power Consumption	Standard Output:	27 watts
	High Output:	47 watts

DELIVERED LUMENS	Stormbell	Stormbell Deco
STANDARD OUTPUT	2066 - 2202 Lumens	2277 - 2639 Lumens
HIGH OUTPUT	3176 - 3354 Lumens	3571 - 4160 Lumens



STORMBELL DECO

LED Pendant Downlight


STORMBELL DECO features an illuminated band between the housing and shade to create visual interest and ambience well suited to interior architectural, retail, hospitality, or institutional applications. The housing in high-gloss black or white finishes may be mixed or matched to white, black, or opal shades to create a unique look tailored to the space. Reflective optics within the housing provide medium or wide beam distributions.

FEATURES

- Designed in Spain, Assembled in the USA
- Universal and timeless design
- Beautiful combination of function and form
- Designed by Artec3 Design Studio



By Experience Brands USA

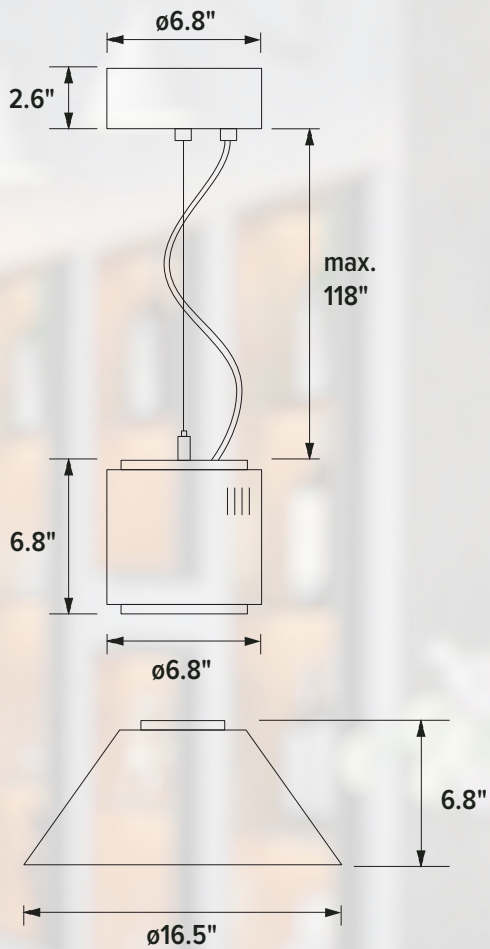


PHOTOMETRICS

STORMBELL STANDARD OUTPUT

MEDIUM BEAM — 3000K

ST173-STD-LED-30K-MB.IES


CIE Type	Direct
Center Beam Candlepower	4,141
Beam (Degrees)	38°
Spacing Criterion	.62
Total Lumens	2,066



WIDE BEAM — 3000K

ST173-STD-LED-30K-WB.IES

CIE Type	Direct
Center Beam Candlepower	2,030
Beam (Degrees)	57°
Spacing Criterion	.98
Total Lumens	2,143




STORMBELL HIGH OUTPUT

MEDIUM BEAM — 3000K

ST173-STD-HP-LED-30K-MB.IES


CIE Type	Direct
Center Beam Candlepower	6,358
Beam (Degrees)	38°
Spacing Criterion	.62
Total Lumens	3,176



WIDE BEAM — 3000K

ST173-STD-HP-LED-30K-WB.IES

CIE Type	Direct
Center Beam Candlepower	3,111
Beam (Degrees)	57°
Spacing Criterion	.98
Total Lumens	3,264




STORMBELL DECO STANDARD OUTPUT

MEDIUM BEAM — 3000K

ST173-DEC-LED-30K-MB.IES


CIE Type	Direct
Center Beam Candlepower	4,015
Beam (Degrees)	39°
Spacing Criterion	.64
Total Lumens	2,277



WIDE BEAM — 3000K

ST173-DEC-LED-30K-WB.IES

CIE Type	Direct
Center Beam Candlepower	2,049
Beam (Degrees)	58°
Spacing Criterion	1.00
Total Lumens	2,567




STORMBELL DECO HIGH OUTPUT

MEDIUM BEAM — 3000K

ST173-DEC-HP-LED-30K-MB.IES


CIE Type	Direct
Center Beam Candlepower	6,336
Beam (Degrees)	39°
Spacing Criterion	.64
Total Lumens	3,571



WIDE BEAM — 3000K

ST173-DEC-HP-LED-30K-WB.IES

CIE Type	Direct
Center Beam Candlepower	3,235
Beam (Degrees)	59°
Spacing Criterion	1.00
Total Lumens	4,048



By Experience Brands USA



LAMP by Experience Brands USA
427 Hyatt Street
Gaffney, SC 29341

info@lampnorthamerica.com
www.lampnorthamerica.com
February 2021 All rights reserved.

info@experiencebrandsusa.com
www.experiencebrandsusa.com



STORMBELL & STORMBELL DECO
LED Pendant Downlight